


ISOMETRIC VIEW FOR REFERENCE

NOTES:-
PART TO BE FREE FROM BURRS & SHARP EDGES.

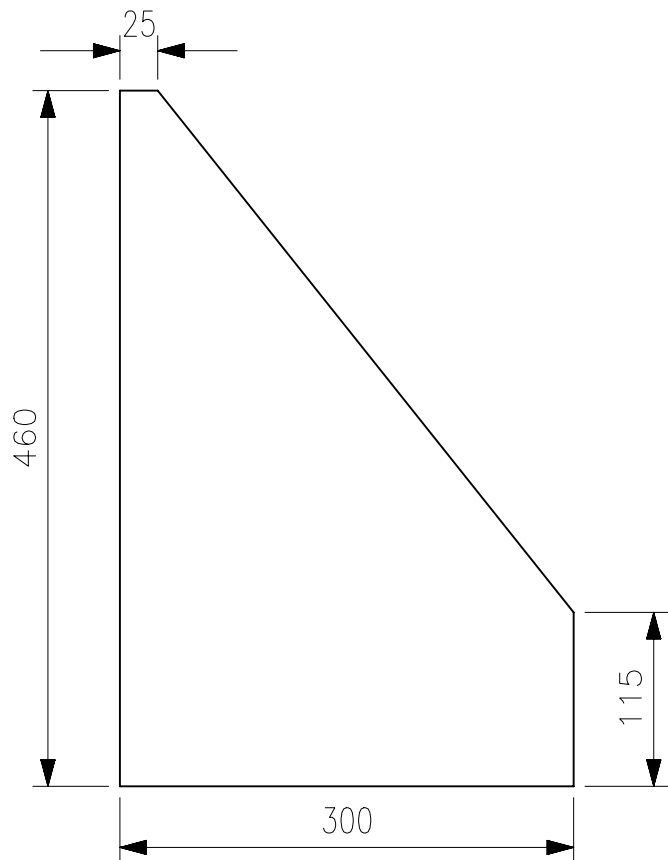

<SC> :SIGNIFICANT CHARACTERISTICS ▽:CRITICAL CHARACTERISTICS

BREAK SHARP CORNERS MAY BE EITHER A CHAMFER
OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.

UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989

DIMENSIONS

LINEAR IN mm.	OVER	0.5	3	6	30	120	400	1000	2000
	UPTO	3	6	30	120	400	1000	2000	4000
f FINE (X.XXX)		± 0.05	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5	-
m MEDIUM (X.XX)		± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2
c COARSE (X.X)		± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2	± 3	± 4
v VERY COARSE (X)		-	± 0.5	± 1	± 1.5	± 2.5	± 4	± 6	± 8

ANGULAR IN deg.	LENGTH OF SHORTER SIDE OF THE ANGLE IN mm.					
	OVER	10	50	120	400	
	UPTO	10	50	120	400	-

f FINE (X.XXX)	± 1°	± 0° 30'	± 0° 20'	± 0° 10'	± 0° 5'
m MEDIUM (X.XX)					
c COARSE (X.X)	± 1° 30'	± 1°	± 0° 30'	± 0° 15'	± 0° 10'
v VERY COARSE (X)	± 3°	± 2°	± 1°	± 0° 30'	± 0° 20'

PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE
REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT
WRITTEN PERMISSION OF M & M LTD.

COMPUTER GENERATED DRAWING DO NOT CHANGE MANUALLY

IF IN DOUBT, ASK DO NOT SCALE DRG SIZE : A4

MAHINDRA & MAHINDRA LIMITED
TRACTOR DIVISION
KANDIVLI (EAST), MUMBAI 400 101, INDIA.

E.R. / PROC.REQ.NO :
ER17C0004669

PART NO. :
008005843C1

PART NAME :
SIDE PLATE-MTG. BRKT.

MATERIAL :
E350

HEAT TREATMENT :

AS PER IS 2062:2011

	NAME	SIGN	DATE	FIRST USED TRCR. MODEL
CAD ENGG.	SPR	-SD-	26.06.15	MSTAR 85-95 HP
DESIGNER	SPR	-SD-	26.06.15	SCALE 1:5
CHECKER	RPK	-SD-	26.06.15	SHEET 1 OF 1
APPR.BY	SAB	-SD-	26.06.15	UNIT QTY. : 2
				WEIGHT : 6.12 kg.

ALL DIMENSIONS ARE IN mm. CHECK DRG WITH LATEST CHANGE No

ER17C0004669	AD		ER RELEASED	MMP	RPK	SAB	24.01.18
ECN17P001708	AC		L2 RELEASE	SSP	RPK	SAB	21.03.17
ECN16P000572	AB	--	L1 RELEASE	SPR	RPK	SAB	24.05.16
----	AA	--	AS PER L0 FEEDBACK FROM CAE	SPR	RPK	SAB	26.06.15
E.R.NO.	LET	LOC	REVISIONS	DSNR	CKR.	APPR.	DATE